
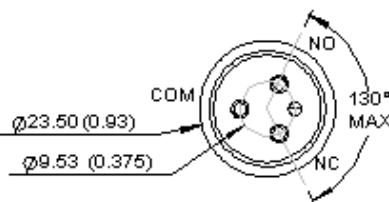


GH1 - GH3 - GH5

3.5 kV

GH1: No Load Switching - GH3: Make & Break Load Switching - GH5: Make Only Load Switching
RoHS Compliant, date code 0601 and later

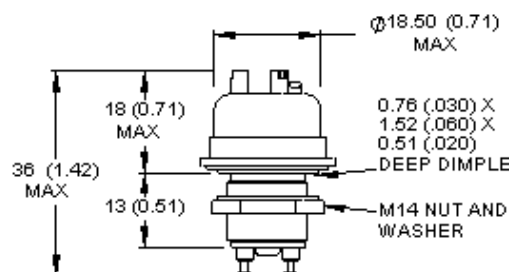

FEATURES

GH 3.5kV SERIES

- Low profile is extremely space efficient, 3.5kV rating
- Easy to mount threaded base with jam nut
- User interchangeable coils provide for driver versatility
- Meets or exceeds standards set in MIL-R-83725

GH1 - No Load Switching

- Low, stable contact resistance minimizes loss in RF circuits
- High carry current, 25Adc continuous, in a small package

GH3 - Make & Break Load Switching

- Durable tungsten contacts for hot load switching*
- Vacuum dielectric for effective arc quenching when opening under load*

GH5 - Make Only Load Switching

- Excellent for capacitive discharge and safety dump switch applications
- Additional isolation capabilities in many applications (*consult factory*)

*Consult factory for load switching apps.

PRODUCT SPECIFICATIONS

Contact & Relay Ratings	Units	GH1	GH3	GH5
Contact Form		C	C	C
Contact Arrangement		SPDT	SPDT	SPDT
Voltage, Test Max., Contacts & to Base (15 μ A Leakage Max., dc or 60Hz)	kV Peak	5	5	5
Voltage, Operating Max., Contacts & to Base (15 μ A Leakage Max.)				
dc or 60 Hz	kV Peak	3.5	3.5	3.5
2.5 MHz	kV Peak	2.5	-	-
16 MHz	kV Peak	2	-	-
32 MHz	kV Peak	1.5	-	-
Current, Continuous Carry Max				
dc or 60 Hz	Amps	25	18	8
2.5 MHz	Amps	14	-	-
16 MHz	Amps	9	-	-
32 MHz	Amps	7	-	-
Coil Hi-Pot (V RMS, 60 Hz)	V	500	500	500
Capacitance				
Across Open Contacts	pF	2	-	-
Contacts to Ground	pF	2.5	-	-
Resistance, Contact Max @ 1A, 28Vdc	ohms	0.01	0.02	0.50
Operate Time	ms	6	6	6
Release Time	ms	6	6	6
Life, Mechanical	cycles	2 million	2 million	1 million
Weight, Nominal	g (oz)	28 (1)	28 (1)	28 (1)
Vibration, Operating, Sine (55-2000 Hz Peak)	G's	10	10	10
Shock, Operating, 1/2 Sine 11ms (Peak)	G's	50	50	50
Temperature Ambient Operating	°C	-55 to +125	-55 to +125	-55 to +125

COIL RATINGS

Nominal, Volts dc	12	26.5	115
Pick-up, Volts dc, Max.	8	16	80
Drop-Out, Volts dc	.5 - 5	1 - 10	5 - 50
Coil Resistance (Ohms $\pm 10\%$)	80	335	6000

Ratings listed are for 25°C, sea level conditions

For more information, refer to

Relay User Instructions

GH 1 - 12Vdc

Model

1
3
5

Coil Voltage*

Blank = 26.5Vdc

12Vdc = 12Vdc

115Vdc = 115Vdc

*Order the relay with the coil voltage in the part number as shown above. The coil voltage will appear on the coil plate near the coil terminals rather than in the P/N on the relay.

01/11/11



GIGAVAC® - P.O. Box 4428 - Santa Barbara, CA 93140-4428 - ph +(805) 684-8401 - +(805) 755-2000
fx +(805) 684-8402 - info@gigavac.com - www.gigavac.com - ©Copyright 2003-2011 GIGAVAC, LLC.